


Mounting instruction: Skamol Primer



1 Skamol Primer is ready to use.

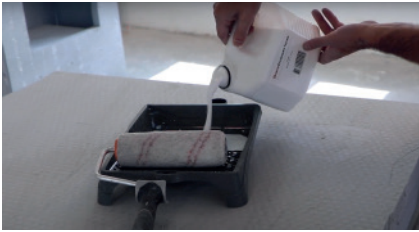

2 Apply Skamol Primer on the surface of the SkamoEnclosure Board where the plaster is to be applied.



3 Plaster can be applied approximately 30 minutes after applying Skamol Primer.

Application

The Skamol Primer is applied on the side of the SkamoEnclosure Board where Skamol Smooth Plaster or Skamol Structural Plaster will be applied

Skamol Primer is ready to use.

- A** Remove dust from the surface of the SkamoEnclosure Board.
- B** Skamol Primer is ready to use. Apply Skamol Primer on the SkamoEnclosure Board in an even layer with a brush, roller or sprayer.
- C** You can easily see when the SkamoEnclosure Board is saturated with Skamol Primer.
- D** Approximately 30 minutes after applying Skamol Primer, the SkamoEnclosure Board is ready for the Skamol Smooth Plaster or Skamol Structural Plaster to be applied.

Skamol Group

Hasselager Centervej 1, 8260 Viby, Denmark
Tel.: +45 97 72 15 33

www.skamol.com