


Mounting instruction: Skamol Torx



1 Pre-drilling is not necessary.

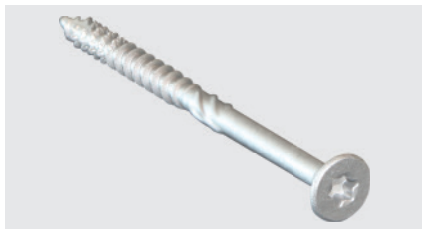

2 Reinforce SkamoEnclosure Board joints, using Skamol Glue.



3 Use Skamol Torx spaced 250 to 350mm apart.

Application

Skamol Torx used to assemble SkamoEnclosure Board.

- A** To ensure a strong construction, a combination of Skamol Torx and Skamol Glue are used at joints between the SkamoEnclosure Board.
- B** Use Skamol Torx spaced 250 to 350mm apart.
- C** It is not necessary to pre-drill the SkamoEnclosure Board.

Skamol Group

Hasselager Centervej 1, 8260 Viby, Denmark
Tel.: +45 97 72 15 33

www.skamol.com